

# SB121100 - 12V110Ah - General Purpose/Standby Series




SB121100 is a General Purpose/Standby Series battery with 12 years of design life in float service. It meets with IEC and JIS standards. With up-dated AGM valve regulated technology and high purity raw materials, the SB series battery has a reliable standby service life. It is suitable for UPS/EPS, medical equipment, emergency light and security systems applications.

## Specifications


- Nominal Voltage: 12 volts
- Nominal Capacity at 77°F/25°C
  - 20 Hour rate 116.4 Ah
  - 10 Hour rate 113 Ah
  - 5 Hour rate 98.5 Ah
  - 1 Hour rate 63.3 Ah
- Number of cells - 6
- Design Life - 12 year(s)
- Internal resistance -  $\pm 4.2 \text{ m}\Omega$
- Operating Temperature Range - (See Charging recommendations)
  - Discharge:  $-40^\circ\text{C}$  to  $60^\circ\text{C}$
  - Charge:  $-20^\circ\text{C}$  to  $50^\circ\text{C}$
  - Storage:  $-20^\circ\text{C}$  to  $60^\circ\text{C}$
- Max. Discharge current - 1100 A (5sec)
- Float Charge - 13.6 to 13.8 Volts @  $25^\circ\text{C}$
- Cyclic charge - 14.6 to 14.8 Volts @  $25^\circ\text{C}$
- Terminal configuration - F5
- Self discharge rate at  $25^\circ\text{C}$  - 3% per month

## General Features


- AGM technology also called VRLA (Valve Regulated Lead Acid) has an efficient gas recombination process which allows for a maintenance free battery.
- Not restricted for air transport and complies with IATA/ICAO Special Provision A67.
- UL-recognized component (MH60449)
- Manufactured in a plant with the following standards:
  - ISO 9001:2008
  - ISO 14001:2004
  - OHSAS 18001:2007
- Can be mounted in any orientation, but not to be charged in a inverted position.
- Computer designed lead/calcium/tin alloy grids for high power density. The lead is virgin lead of the highest purity.
- Long service life ( years) designed for float/standby applications.
- Low self discharge rate.



**Dimensions:** 328(L)x172(W)x215(H) mm/12.9 x6.77x8.46 inches

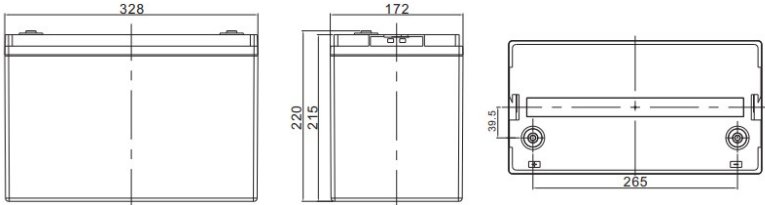

**Weight:** Approx. 32 kg











F5 Terminal

## Constant Current Discharge Characteristics: Amps @ 25°C

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	256.7	198.0	116.6	68.4	41.0	30.1	24.4	20.6	13.8	11.7	6.01
1.65V	249.0	192.8	114.0	67.1	40.4	29.7	24.1	20.4	13.6	11.6	5.97
1.70V	239.0	186.0	110.6	65.5	39.6	29.2	23.7	20.1	13.5	11.5	5.90
1.75V	226.0	177.1	106.2	63.3	38.5	28.5	23.2	19.7	13.2	11.3	5.82
1.80V	209.4	165.7	100.5	60.4	37.1	27.5	22.5	19.1	12.9	11.0	5.70
1.85V	188.7	151.3	93.1	56.7	35.3	26.3	21.6	18.4	12.5	10.7	5.55

## Constant Power Discharge Characteristics: Watts @ 25°C

F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	442.9	351.4	214.9	129.8	78.8	58.3	47.6	40.4	27.3	23.4	12.0
1.65V	441.1	349.4	213.3	128.8	78.3	57.9	47.3	40.1	27.1	23.2	11.9
1.70V	428.0	339.9	208.	126.0	76.9	57.0	46.6	39.6	26.8	22.9	11.8
1.75V	412.1	328.4	201.9	122.4	75.2	55.9	45.7	38.9	26.4	22.6	11.7
1.80V	388.5	311.6	192.9	117.3	72.9	54.3	44.5	37.9	25.8	22.1	11.5
1.85V	356.2	288.5	180.6	110.9	69.7	52.1	42.8	6.	25.0	21.4	11.2

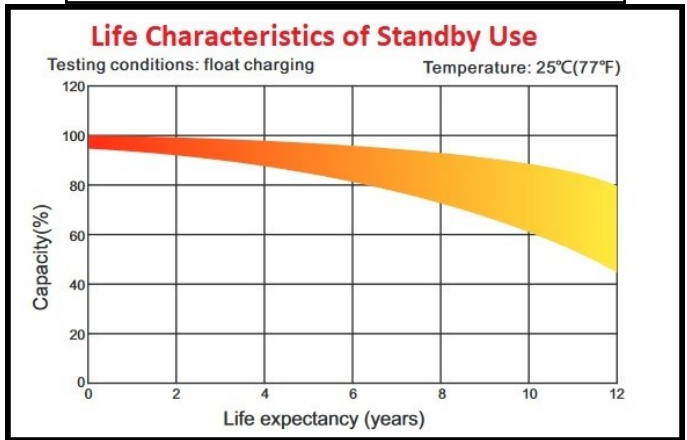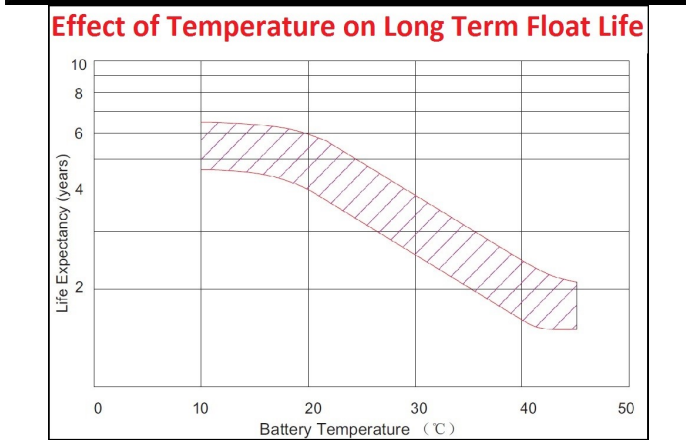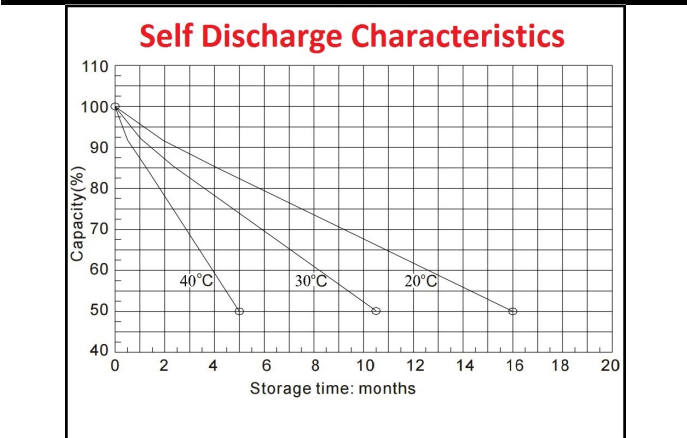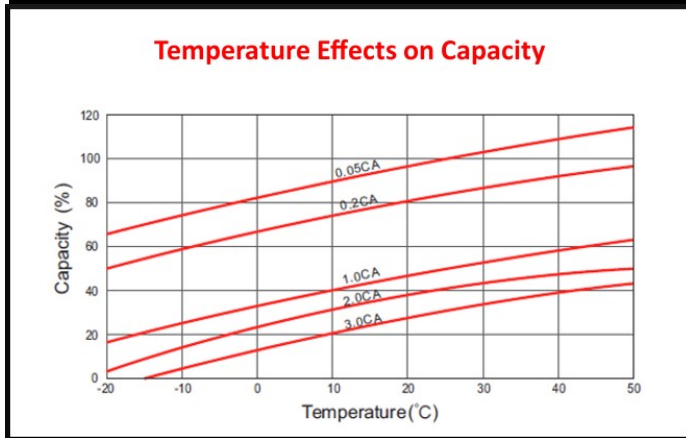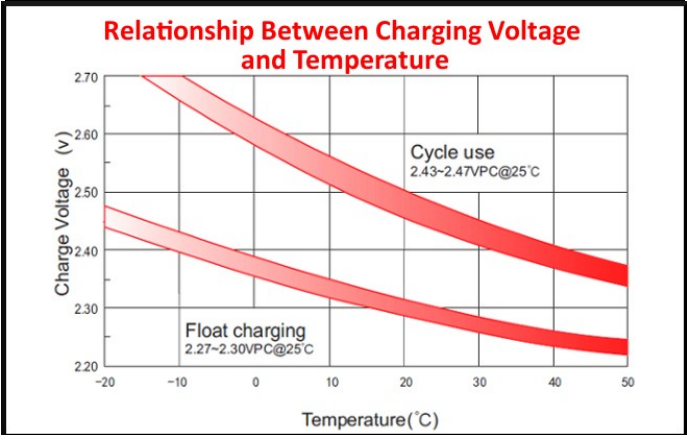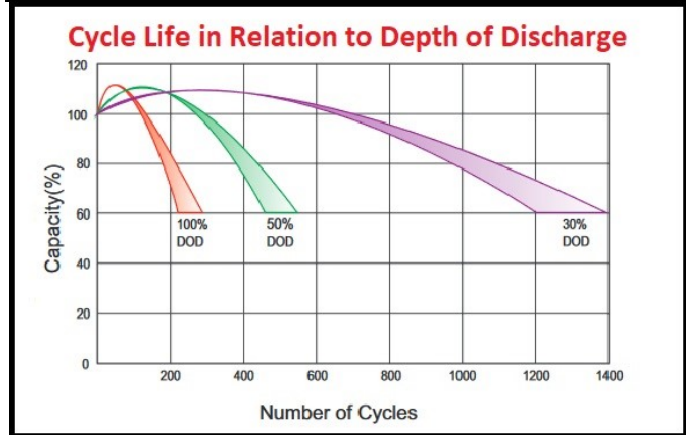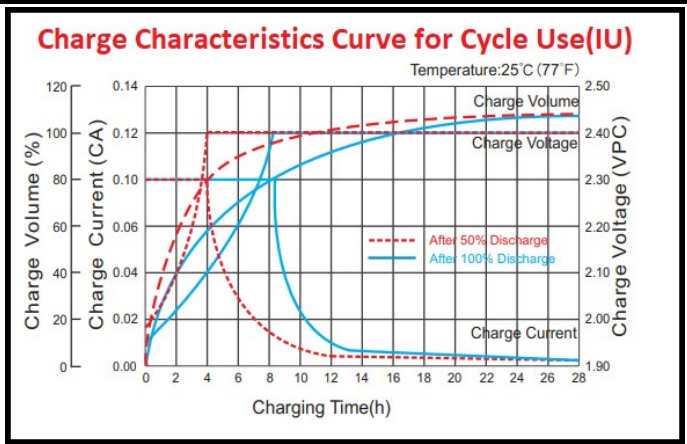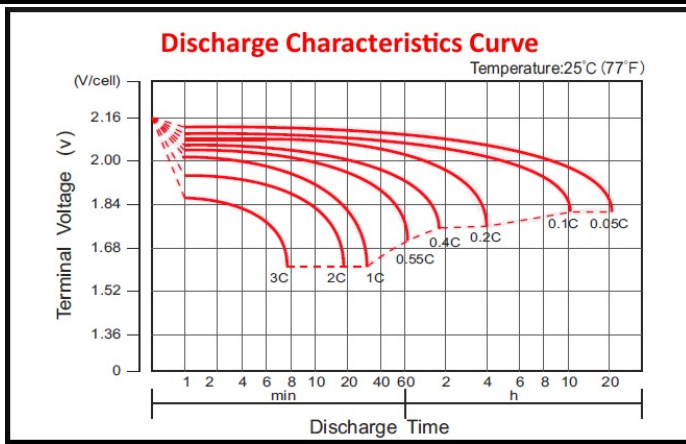

# SB121100 - 12V110Ah - General Purpose/Standby Series

---

## Charging Recommendations

- For standby (float) use 2.27 to 2.3 volts per cell (@ 25°C).
- For cyclic use 2.43 to 2.47 volts per cell (@25°C)
- Recommended maximum charging current limit is 33 Amp.
- Charging voltage should be regulated in relation to the ambient temperature. When the temperature is higher, the charging voltage should be lower. Where the temperature is lower, the charging voltage be higher. (3 mVolts per °C per cell in standby applications and 4 mVolts per °C per cell in cyclic applications). Typical applications in a range of 0°C-30°C do not require this compensation.
- It is recommended that "refresh charging" be applied to any battery which has been stored for a long period of time, prior to putting the battery into service and/or within 6 months after manufacture.
- To obtain the optimum standby performance it is vital that the correct charging profile is utilised (see Charge Characteristics figures)
- Typically it takes more energy to recharge a battery that it has expended. The ratio is 1.1 - 1.15 has to get into battery for every 1.0 that was supplied by the battery.

## Service Life

- Please refer to the life curves provided. These curves represent typical results under optimum operating conditions. Actual life will vary due to variability of these conditions.
- Improper charging (overcharging and lack of charging) is the number one reason why AGM/VRLA batteries fail prematurely. Follow charging guidelines found on this specification sheet.
- Elements that affect Cycle Life: There are various factors that will have an effect on the service life of AGM/VRLA batteries in cyclic applications; ambient operation temperature, discharge rate, depth of discharge, the manner in which the battery is recharged, and the timeliness of the recharge, to obtain maximum service life it is recommended not to go beyond 80% DOD (Depth Of Discharge) and if all possible limit it to 50 % DOD. At 50 % you will obtain the ideal trade-off for life expectancy for AGM batteries. This recommendation goes for all brands of AGM batteries.
- Elements that affect standby life: All the same factors are responsible but the most important in this case is the ambient temperature followed closely by the charging parameters. For example - in an enclosed UPS cabinet with no ventilation temperatures, are most often than not well above 25°C, henceforth battery life is severely affected.

## Warnings

- Never install AGM/VRLA batteries in an airtight container.
- Keep away from sparks, and any source of flames.
- Connect cables tightly to avoid sparks at terminals.
- The electrolytes contains sulfuric acid which can cause serious damage to eyes and skin. Should this occur, flush profusely with water and seek medical attention.
- Do not short circuit AGM/VRLA terminals with metal object, they are capable of generating hundreds of amperes, you can seriously burn yourself in short circuiting a battery.
- Mixing batteries of different capacities, age and/or manufacturer is not recommended.